

Installation Instructions for 5 and 6-Stud STEMCO Hubodometer® Mounting Bracket

Part Number 610-0024



Figure 1
(Mounting Plate)

1. Assemble Hubodometer® to 1/2" center hole in mounting plate. Place washer on Hubodometer® stud. Fasten and torque lock nut on Hubodometer®. It is recommended that a strap wrench be used to hold Hubodometer® while tightening.

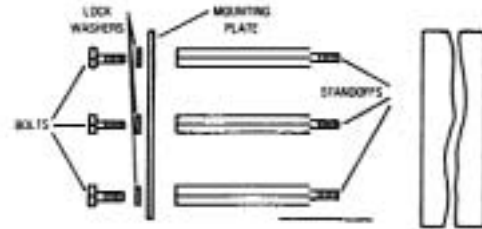


Figure 2
(Hubodometer® Mounting Bracket)

2. **FOR FIVE-HOLE HUBCAPS**, remove bolts A, B and C and install standoffs. Torque to 12 ft/lbs maximum. (See Figure 3)

2. **FOR SIX-HOLE HUBCAPS**, remove bolts D, E and F and install standoffs. Torque to 12 ft/lbs maximum. (See Figure 4)

3. Place assembled mounting plate on standoffs and torque to 12 ft/lbs maximum, utilizing best fitting hole pattern.




Figure 3
(5-Hole Hubcap)




Figure 4
(6-Hole Hubcap)



A Higher Standard of Performance.™

QS 9000 & ISO 9001

STEMCO-USA • P.O. Box 1989 • Longview, TX 75606-1989
(903) 758-9981 • 1-800-527-8492 • FAX: 1-800-874-4297 • www.stemco.com

STEMCO-CANADA • 5900 Ambler Drive, Units 4 & 5 • Mississauga, ON L4W 2N3
(905) 206-9922 • 877-232-9111 • FAX: 877-244-4555

STEMCO and Hubodometer are registered trademarks of STEMCO ©2002 STEMCO.



Printed in the USA
(Hudson 10-492) 09-611-0037
Rev. 9/02